

Tri-State Enable/Disable 3.3V Oscillator



Model: H5C-2E3LF

RoHS Compliant / Pb Free

Rev. 10/24/2011

http://www.foxonline.com/need_a_sample.htm

Need a
Sample®

FEATURES

- 3.3V Operation
- HCMOS Output
- Tri-State Enable/Disable
- 8-Pin DIP

OPTIONS

- 14-Pin DIP Available (F5C-2E3LF)

• PART NUMBER SELECTION [Learn More](#) - Internet Required


Part Number	Model Number	Frequency Stability ¹	Operating Temperature (°C)	Frequency Range (MHz)
350LF-Freq-xxxxx	H5C-2E3LF	±100PPM	0 ~ +70	1.500~59.000
351LF-Freq-xxxxx	H5C-2E3RLF	±100PPM	-40 ~ +85	1.500~59.000
272LF-Freq-xxxxx	H6C-2E3LF	±50PPM	0 ~ +70	1.500~59.000

• ELECTRICAL CHARACTERISTICS

PARAMETERS	MAX (unless otherwise noted)
Frequency Range (Fo)	1.500 ~ 59.000 MHz
Storage Temperature Range (T _{STG})	-55°C ~ +125°C
Supply Voltage (V _{DD})	3.3V ± 10%
Input Current (I _{DD})	
1.500 ~ 23.999 MHz	15mA
24.000 ~ 49.999 MHz	20mA
50.000 ~ 59.999 MHz	40mA
Output Symmetry (50% V _{DD})	40% ~ 60%
Rise Time (10% ~ 90% V _{DD}) (T _R)	10nS
Fall Time (90% ~ 10% V _{DD}) (T _F)	10nS
Output Voltage (V _{OL})	10% V _{DD}
(V _{OH})	90% V _{DD} Min
Output Current (I _{OL})	8mA Min
(I _{OH})	-8mA Min
Output Load (HCMOS)	15pF
Start-up Time (T _s)	10mS
Output Enable/Disable Time ²	100nS

¹ Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, aging, shock, and vibration.

² An internal pullup resistor from pin 1 to V_{DD} allows active output if pin 1 is left open. All specifications subject to change without notice.

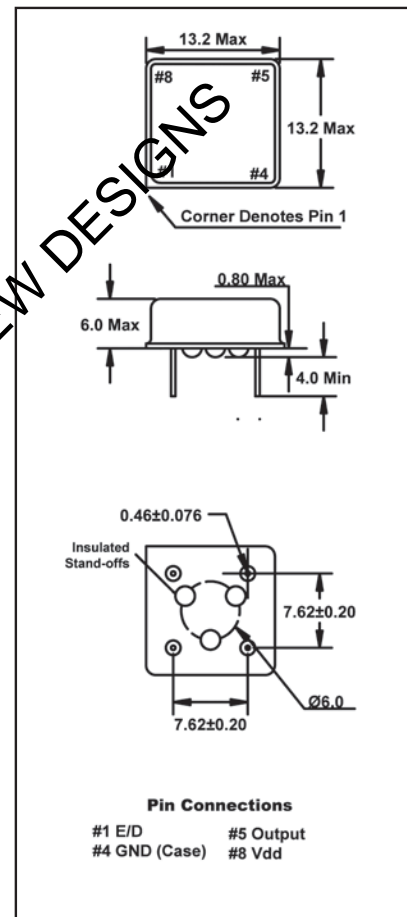

• ENABLE / DISABLE FUNCTION

INH (Pin 1)	OUTPUT (Pin 5)
OPEN ²	ACTIVE
'1' Level V _{IH} ≥ 2.2 V	ACTIVE
'0' Level V _{IL} ≤ 0.8 V	High Z